


- Direction Of Water Flow
- Direction Of Exhaust Gas Flow

915B	915	1	Plug - 1/4" BSP	12	Brass
EX034-4059CI	4059	1	EX34 End Cover Eccentric	11	C.I.
3597	3597	1	CSK Plug - ¾" BSP	10	C.I.
4463	4463	1	Nameplate	9	S.S.
916	916	2	Plug - 1/2" BSP	8	Brass
4028	4028	1	Safety Valve	7	Brass
4478	4478	2	Mounting Foot	6	M.S.
HS08X35SS	_	16	Socket Screw - M8 x 35mm	5	S.S.
HN08SS	-	16	Hex Head Nut - M8	4	S.S.
3789	3789	2	Gasket	3	SP-AF/II
EX004-3759CI	3759	1	EX4 End Cover Concentric	2	C.I.
3779-6TD	3779-6	1	Tubestack 4-40	1	S.S.
Part No.	Drg No.	Qty	Description	Item	Material

Notes: Maximum Working Water Pressure - 4 Bar Maximum Working Water Temperature - 110°C Maximum Working Exhaust Gas Pressure - 0.5 Bar Maximum Working Exhaust Gas Temperature - 700°C See Range Drawing No. 3739 For Revision History.

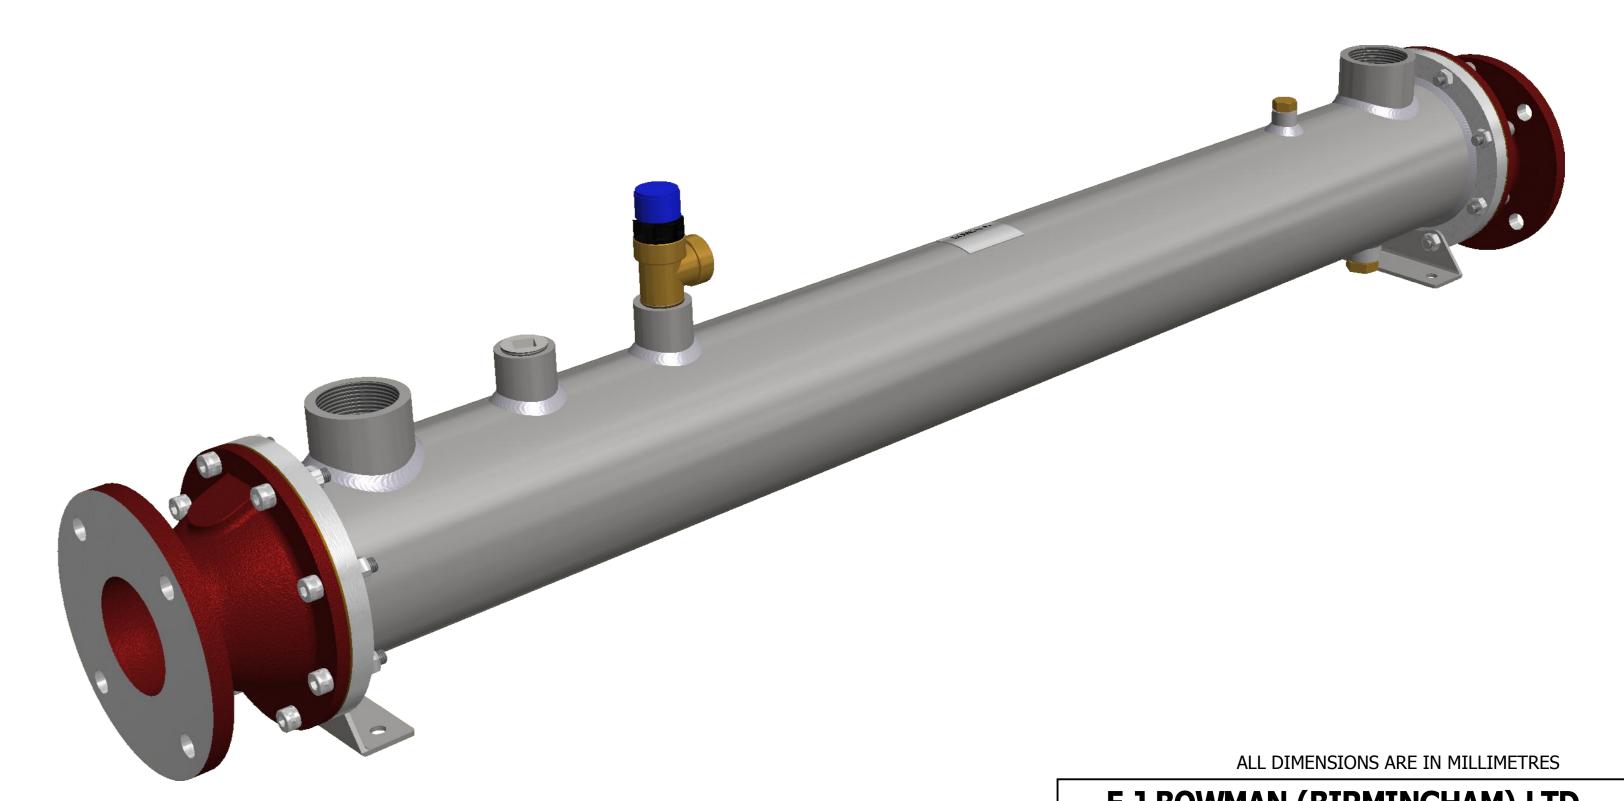

E.J.BOWMAN (BIRMINGHAM) LTD.

Chester Street Birmingham B6 4AP England
Tel: +44(0) 121 359 5401 Fax: +44(0) 121 359 7495
email: info@ejbowman.co.uk www.ejbowman.co.uk

DRAWN:

J. SWAIN TITLE: