


Option with other rotor thread "A":

GR 25 F-100 RH: A = 1" NPT RH

GR 25 F-200 RH: A = 11/2"-12 UNF RH

GR 25 F-400 RH: A = M35x1,5 RH

TURIAN in Deutschland: **MOEBIUS GmbH**, Im Hermgarten 24
D-65527 Niedernhausen
Tgl.: +49-6127-78544, Fax: -78548
Email: info@moebius-niedernhausen.de
Web: www.moebius-niedernhausen.de

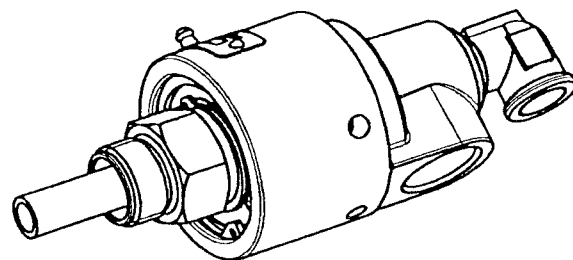

	TARGETTA
	GR 25 F-RH
p	40 bar
T	170 °C
N	3000 RPM

GR 25 F-RH

SIPHON TUBE NOT INCLUDED

5				quantità	 $Ra = 0,2$ $Rz = 0,8$ $Rq = 1,2$ $Rx = 12$ $Gz = 220$
4					
3				smussi non quotali	
2				0,3 mm	
1				trattamento	
		descrizione modifica	data	firma	
materiale			componente		modello
			GR25F-ASS		GR 25 F
data		firma		TOLLERANZA GENERALE DI LAVORAZIONE ±0,05 UNI 5007 ☐ Grossolano ☐ Medio ☐ Precisione	scala 1.000
27-04-05					
TURIAN			descrizione		
Castellanza			GIUNTO 1" GAS		
			N° disegno		
			8233		A