

BEH-530H

300 Watt

**NEW**

AC input

- ✓ High efficiency up to 91 %
- ✓ No minimum load required!
- ✓ ErP Lot6 2013 ready!
- ✓ Wide temperature range -10...+60 °C
- ✓ Designed for continuous operation 24/7
- ✓ Low noise due to temperature regulated fan
- ✓ Compact design

Technical data	
Input voltage	90...264 V AC, active PFC
Input frequency	47...63 Hz
Input current	2 A (230 VAC) / 4 A (115 VAC)
Inrush current	80 A (264 VAC)
Efficiency	See diagram
Hold up time	16 ms (230 VAC and full load)
Power-Good-Signal	Switch on delay 100...500 ms Switch off delay 1 ms
Protection	Short circuit protection: +3.3V, +5V, +12V: latch Overload protection: switch off at 135 %, +12V: 22...30 A / +5V: 22...45 A / +3.3V: 22...50 A Overvoltage protection: +3.3 V (+4.8 V), +5 V (+7 V), +12 V (+16.0 V)
Earth leakage current	<3.5 mA
Safety / EMC	EN/UL 60950-1, meet CCC, CE
Temperature	Operating: -10...+60 °C / Storage: -20...+85 °C
Derating	From +50...+60 °C, 2 %/ °C
MTBF	>288 000 h according to MIL-HDBK-217F at +25 °C without fan
Max. operation altitude	5000 m
Humidity	Operating: 10 %...85 % RH, non-condensing Storage: 10...90 % RH, non-condensing
Dimensions (WxDxH)	81.5 x 150 x 40.5 mm ±0.5 mm
Weight (net)	0.7 kg

Article No.	Output voltage	Output current min	Output current max	Load regulation	Ripple & Noise
BEH-530H	+3.3 V	0 A	14 A	±5 %	50 mV
	+5 V	0 A	16 A	±5 %	50 mV
	+12 V ₁	0 A	16 A	±5 %	120 mV
	+12 V ₂	0 A	16 A	±5 %	120 mV
	-12 V	0 A	0.5 A	±10 %	120 mV
	+5 V _{sb}	0 A	3 A	±5 %	50 mV

Max. output on +3.3 V and +5 V combined shall not exceed 100 W. Ripple and Noise was measured by a 20 MHz bandwidth limited oscilloscope with connected 10 µF electrolytic capacitor and 0.1 µF ceramic capacitor at each output. Ripple and Noise can deviate if start is at temperatures below 0°.

As a power component this PSU is for assembly purposes only and must not be operated in unassembled condition.


The final assembly has to comply with the valid EMC and safety standards.

Optional Accessories


▷▷▷ For detailed information please visit our website www.bicker.de and refer to the article number.

X1-132 | Power cord


With IEC-60320-C13 connector,
length 1800 mm

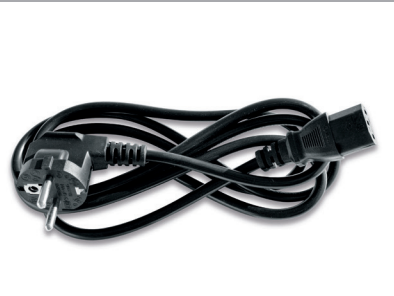

Efficiency curve

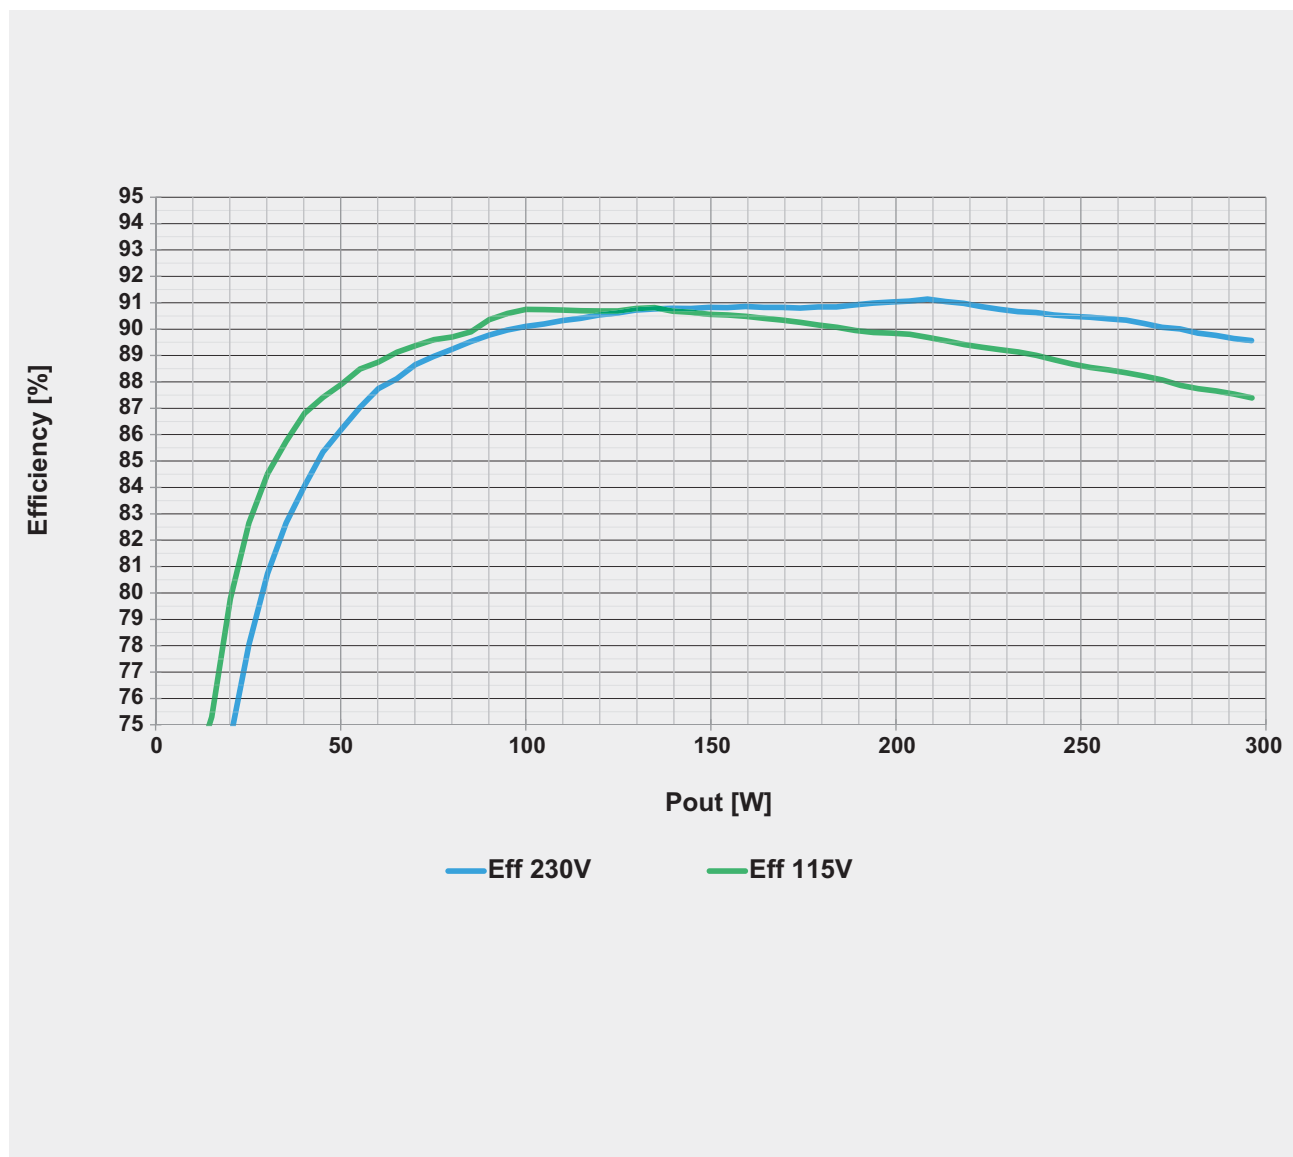

EMC curve

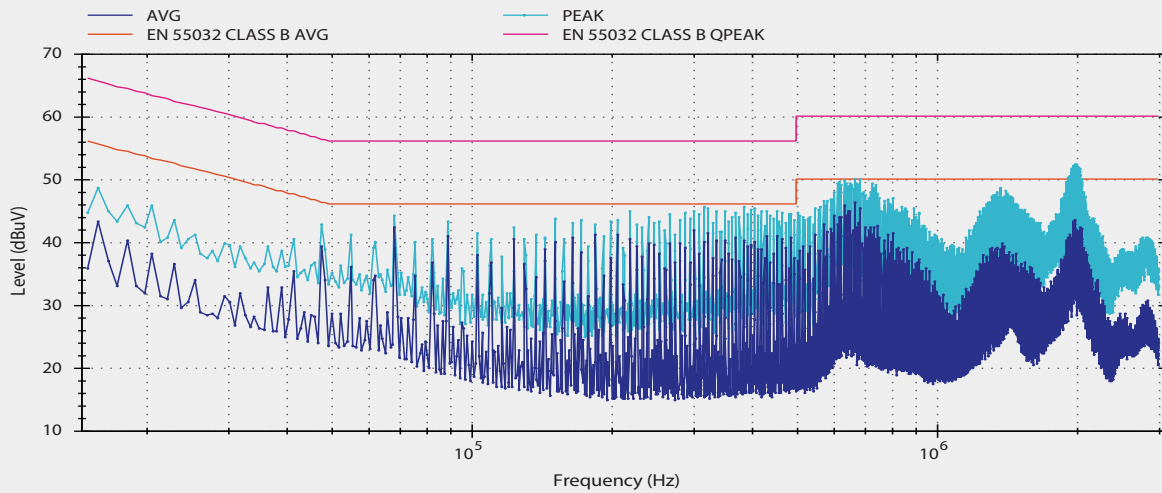
**Measurement conditions**

Vin = 230 VAC / 50 Hz


Output = 300 W (full load)

Tamb: 22 °C


Derating

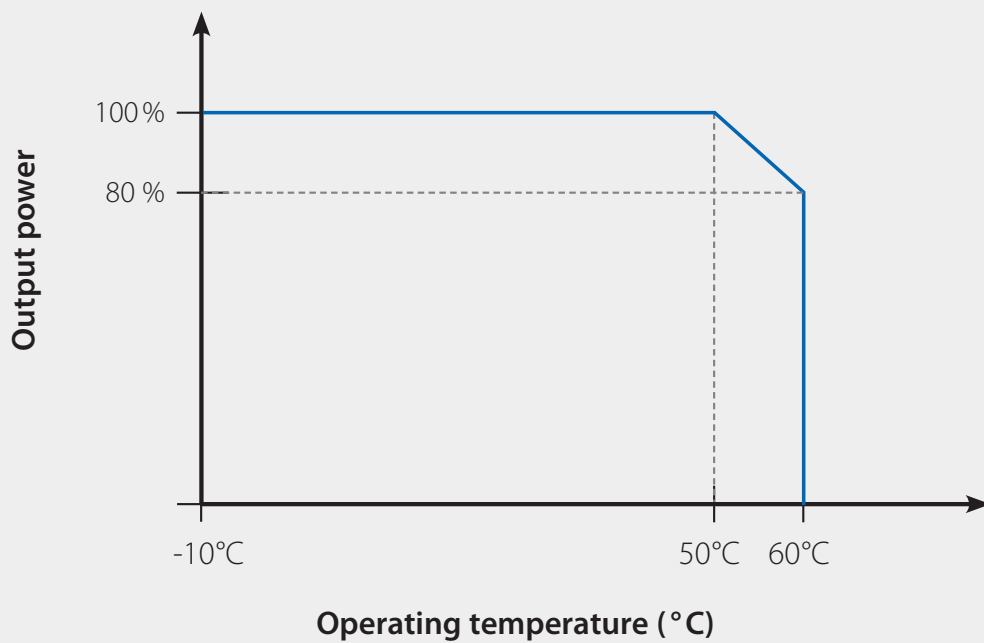

Drawing BEH-530H

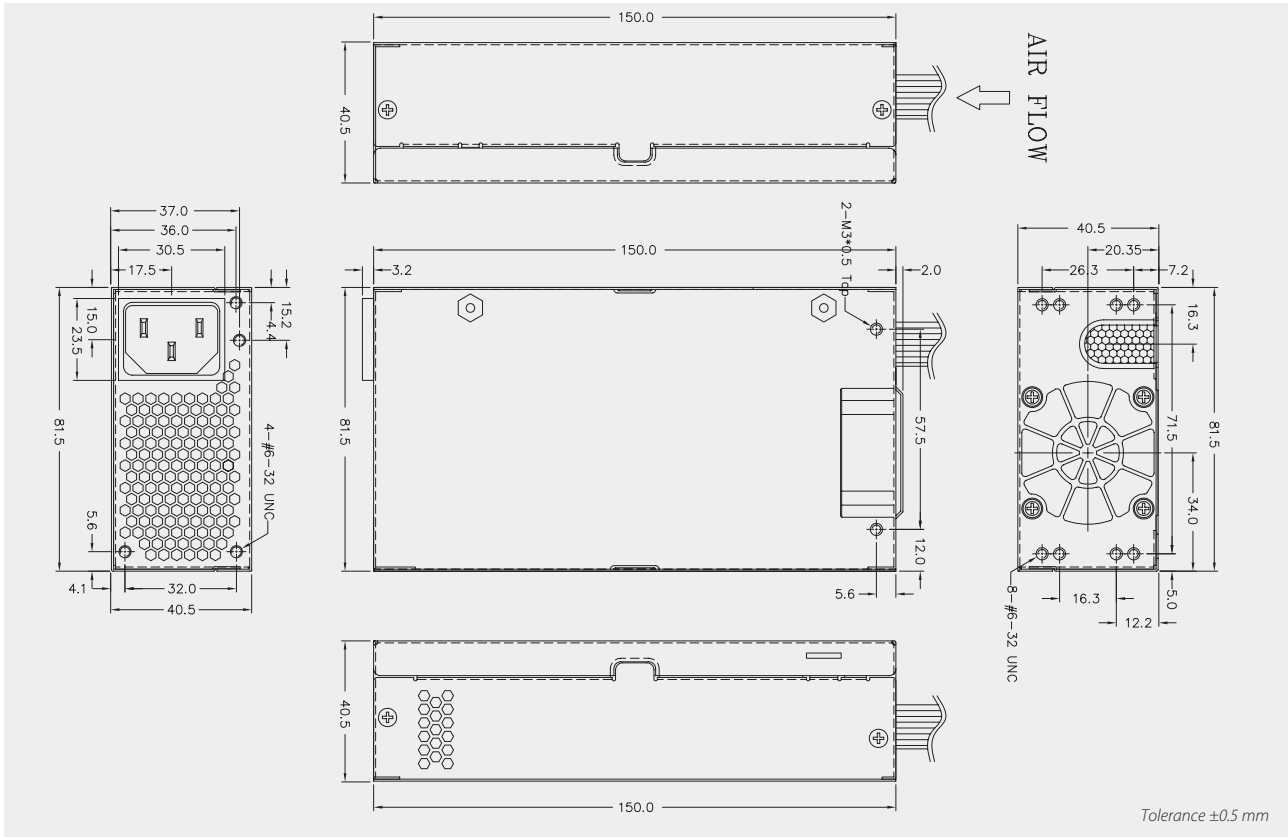


Mounting bracket included in delivery

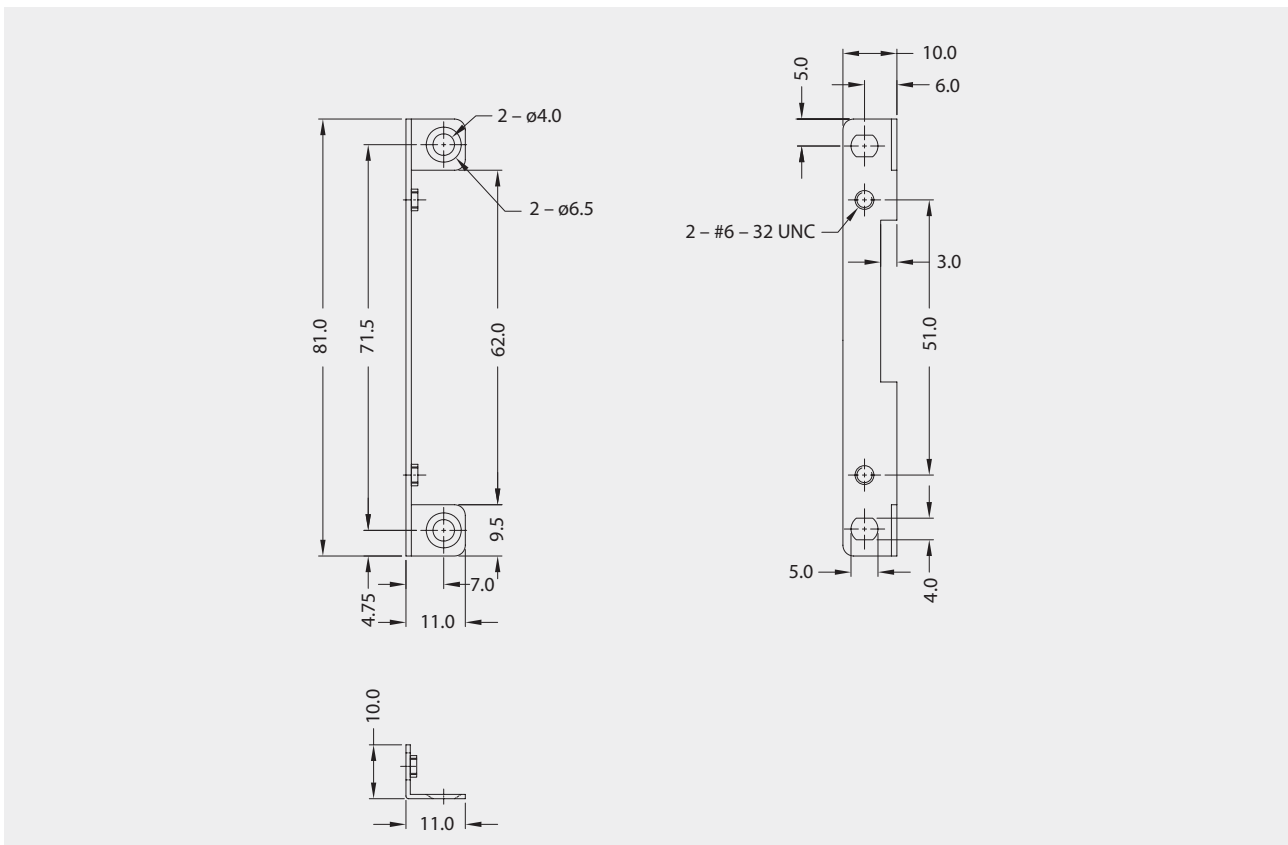

Cable harness BEH-530H

ATX/EPS, 400 mm
20+4 pin

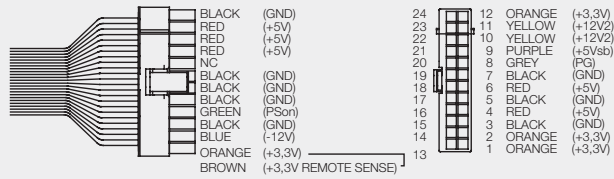


P4, 400 mm




SATA 90°, 350 mm
SATA, 150 mm



SATA 90°, 350 mm
SATA, 150 mm



HD, 350 mm
HD, 150 mm
FDD, 150 mm

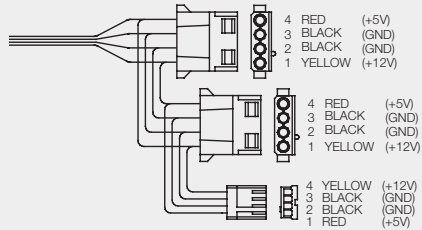

Tolerance ± 20 mm