





DO NOT SCALE

THIRD ANGLE PROJECTION




DIMENSIONS IN MILLIMETRES

FIXING SCREW TORQUE SETTINGS	
M4	2.2 Nm
M5	4.3 Nm
M6	7.3 Nm
M8	17.7 Nm
M10	35.5 Nm

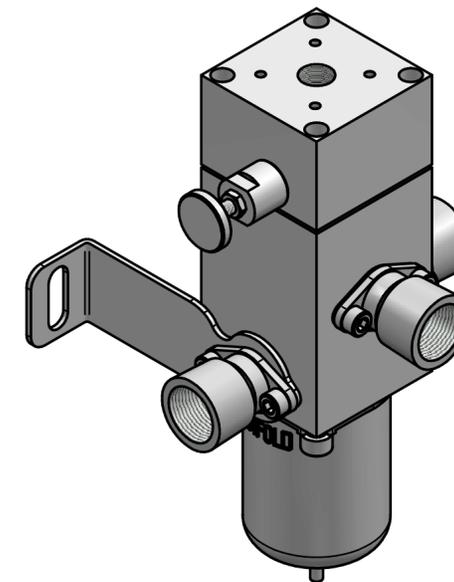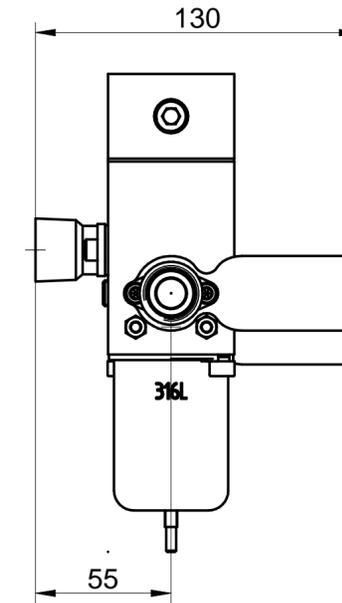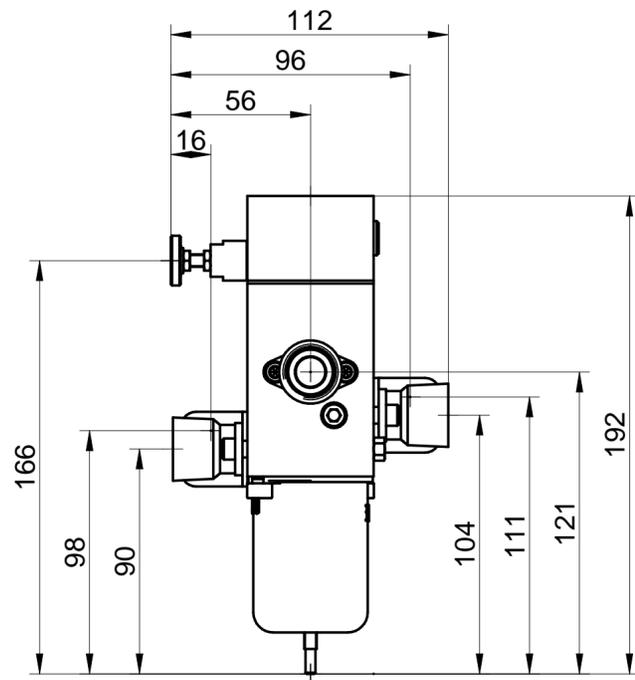

SCHEMATIC



REV	DATE	DRAWN	CHKD	REVISION
0	03.07.14	CONF		PRODUCTION ISSUE

NOTES :  
 1.) O-RING MATERIAL CODE 'X' S = NITRILE  
 V = VITON  
 AL = FLUOROSILICONE  
 AG = SILICONE  
 2.) ALL DIMENSIONS NOMINAL UNLESS OTHERWISE STATED.

VALVE TYPES/USED ON	

**Bifold**<sup>®</sup> Bifold Fluidpower Limited  
 Bifold Group, Oldham Broadway Business Park, Chadderton, Gr. Manchester OL9 9XA  
 Telephone (44) 0161 345 4777 Fax (44) 0161 345 4780

PROJECT TITLE	VBP-08-11-X-MD-X4		PROJECT No.	
DRAWING TITLE	GENERAL INSTALLATION		DRAWING No.	0-IN0499
DRAWN	DATE	CHECKED	DATE	APPROVED
CONF	03.07.14			

Copyright © 2000 BIFOLD FLUIDPOWER LTD. All Rights Reserved C.A.D. Produced Drawing DO NOT Change By Hand